

## 2/2-Wege-Magnetventil

2/2-Wege-Ausführung

Artikel Nr. 148587

Typen Nr. MVB.ES.230V.G12.0,5-12B



Beispielhafte Darstellung

Die Standardbaureihe in den Ausführungen

- direktgesteuert
- vorgesteuert

Gerätesteckdose nach ISO 4400

Mediumstemperatur max. 130 °C

### Technische Informationen

Gehäuse	Edelstahl 1.4401
Ventilsitz	Edelstahl
Innenteile	Edelstahl
Schutzart	IP 65
Bauform	4
Gewinde	G 1/2 IG
Spannung	230 V AC
Betriebsdruck	0,5 - 12 bar
Dichtmaterial	EPDM
Elektrischer Anschluss	ISO 4400 / EN 175301-803 Bauform A
Mediumstemperatur	-10 bis 130 °C
Umgebungstemperatur	-10 bis 60 °C
Gewindenorm	DIN EN ISO 228-1
Öffnung	12,5 mm
A	82 mm
B	79 mm
C	52 mm

## Kaufmännische Daten

Zolltarifnummer	84812090
Ursprungsland	TR
eCl@ss 5.1.4	27220601
eCl@ss 9.0	27220601
UNSPSC_Code_v190501	40141605
UNSPSC_CodeDesc_v190501	Solenoid valves

## Material Informationen

REACH SVHC1 Stoff Name	lead
CAS-Nr. SVHC 1	7439-92-1
RoHS Werkstoff-Hinweis	RoHS compliant
REACH Info	contains SVHC substance

## Stainless Steel Solenoid Valve SS1031 Series (G3/8", G1/2", G3/4", G1", G1 1/4", G1 1/2", G2")

### GENERAL FEATURES

- Wide pressure range, flow rate and orifis options.
- Solenoid valvs are used with filters.
- Solenoid valves can be mounted in any position without affecting its operation; Coil to be used in a vertical position.

### ELECTRICAL CHARACTERISTICS

Continuous Duty : ED %100  
 Coil Insulation Class : H (180°C)(IEC 85)  
 Coil Impregnation : Polyester Fiber Glass  
 Ambient Temperature : -10°C, +60°C  
 Protection Degree : IP65 (ISO 60529) On request; IP68  
 Electric Plug Connection : DIN 46340 3-Poles Connector (DIN 43650)  
 Connector Specification : ISO 4400 / EN 175301-803 Form A,  
 Spade Plug (Cable Ø6-8 mm)  
 Electrical Safety : IEC 335  
 Standard Voltages : AC 12V 15VA, 24V 15VA, 48V 15VA,  
 110V 15VA, 230V 15VA, 230V 24VA  
 DC 12V 18W, 24V 18W, 48V 18W, 110V 18W

On request other voltages

Voltages Tolerance : AC -15%, +10% DC -5%, +10%

Frequency : 50 Hz (60 Hz...)

On request; Connector with LED, PWM Socket Specify coil voltage with order

### MATERIALS IN CONTACT WITH FLUID

Body : Stainless Steel (AISI 316)  
 Internal Parts : Stainless Steel  
 Sealing : EPDM On request; VITON, NBR  
 Shading Ring : Copper (EN 12735-1)  
 Seats, Core Tube, Springs: Stainless Steel

### OPTIONS

Female connection: BSP; (On request NPT)

- On request Atex (explosion proof) coil.

### TECHNICAL FEATURES

Max. Viscosity : 5°E (-37cST veya mm²/s)

Response Time : Opening time : 400 ms - 1600 ms


Closing Time : 1000 ms - 2000 ms

### SEALS FEATURES

NBR : -10°C...+80°C

EPDM : -10°C...+130°C

VITON : -10°C...+160°C

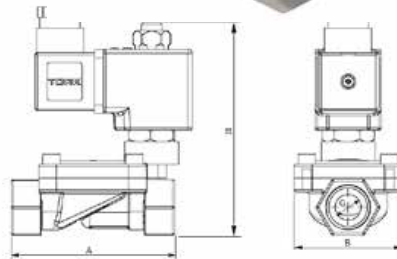

NORMALLY OPEN

2/2 WAY

PILOT OPERATED

ΔP=0,5



Dimensionis(mm)

G	A	B	H
3/8"	79	52	98
1/2"	79	52	98
3/4"	75	58	130
1"	90	61	117
1 1/4"	110	95	158
1 1/2"	129	95	158
2"	150	110	179

Coils	Nominal Values	Cold/ Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C40012VDC18W	12VDC 18W	COLD	19,56	19,56	1,63	20
		HOT	14,52	14,52	1,21	106
C40024VDC18W	24VDC 18W	COLD	20,88	20,88	0,87	25
		HOT	14,64	14,64	0,61	116
C40110VDC18W	110VDC 18W	COLD	19,96	19,96	0,18	23
		HOT	13,56	13,56	0,123	115
C40012VAC15VA	12VAC 15VA	COLD	23,81	16,43	1,3	25
		HOT	-	15,86	1,262	79
C40024VAC15VA	24VAC 15VA	COLD	25,82	15,02	0,62	22
		HOT	-	13,91	0,57	81
C40110VAC15VA	110VAC 15VA	COLD	30,65	15,17	0,137	24
		HOT	-	13,96	0,126	80
C40230VAC15VA	230VAC 15VA	COLD	31,4	15,64	0,068	25
		HOT	-	14,41	0,063	80
C40230VAC24VA	230VAC 24VA	COLD	45,1	23,92	0,0154	23
		HOT	-	21,62	0,0154	100

Solenoid Valve Symbol	Valve Type/ Order No	Connection Size	Orifice Size	Pressure min/max		Kv	Seal			Weight
				Bar	Bar		l/min	EPDM	VITON	
	SS1031	G	mm	Bar	Bar	l/min	EPDM	VITON	NBR	kg
	SS1031.02	3/8"	12,5	0,5	12	48	✓	✓	✓	1,15
	SS1031.03	1/2"	12,5	0,5	12	48	✓	✓	✓	1,1
	SS1031.04	3/4"	20	0,5	12	108	✓	✓	✓	1,12
	SS1031.05	1"	25	0,5	12	172	✓	✓	✓	1,3
	SS1031.06	1 1/4"	30	0,5	12	315	✓	✓	✓	3,55
	SS1031.07	1 1/2"	39	0,5	12	430	✓	✓	✓	3,45
	SS1031.08	2"	46	0,5	12	690	✓	✓	✓	3,88

### STANDARDS

• Standard tube connection G (BSP) (ISO 228-1) and other tube connections (NPT (ANSI120.3)) are available on request.

• TORK solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).

**Not:** Please look catalogues for more details.

## Stainless Steel Solenoid Valve SS1031 Series (G3/8", G1/2", G3/4", G1", G1 1/4", G1 1/2", G2")

### GENERAL FEATURES

- Wide pressure range, flow rate and orific options.
- Solenoid valves are used with filters.
- Solenoid valves can be mounted in any position without affecting its operation; Coil to be used in a vertical position.

### ELECTRICAL CHARACTERISTICS

Continuous Duty : ED %100  
 Coil Insulation Class : H (180°C)(IEC 85)  
 Coil Impregnation : Polyester Fiber Glass  
 Ambient Temperature : -10°C, +60°C  
 Protection Degree : IP65 (ISO 60529) On request; IP68  
 Electric Plug Connection : DIN 46340 3-Poles Connector (DIN 43650)  
 Connector Specification : ISO 4400 / EN 175301-803 Form A,  
 Spade Plug (Cable Ø6-8 mm)  
 Electrical Safety : IEC 335  
 Standard Voltages : AC 12V 15VA, 24V 15VA, 48V 15VA,  
 110V 15VA, 230V 15VA, 230V 24VA  
 DC 12V 18W, 24V 18W, 48V 18W, 110V 18W

On request other voltages

Voltages Tolerance : AC -15%, +10% DC -5%, +10%  
 Frequency : 50 Hz (60 Hz...)

On request; Connector with LED, PWM Socket Specify coil voltage with order

### MATERIALS IN CONTACT WITH FLUID

Body : Stainless Steel (AISI 316)  
 Internal Parts : Stainless Steel  
 Sealing : EPDM On request; VITON, NBR  
 Shading Ring : Copper (EN 12735-1)  
 Seats, Core Tube, Springs: Stainless Steel

### OPTIONS


Female connection: BSP; (On request NPT)  
 • On request Atex (explosion proof) coil.

### TECHNICAL FEATURES

Max. Viscosity : 5°E (-37cST veya mm<sup>2</sup>/s)  
 Response Time : Opening time : 400 ms - 1600 ms  
 Closing Time : 1000 ms - 2000 ms

### SEALS FEATURES

NBR : -10°C...+80°C  
 EPDM : -10°C...+130°C  
 VITON : -10°C...+160°C

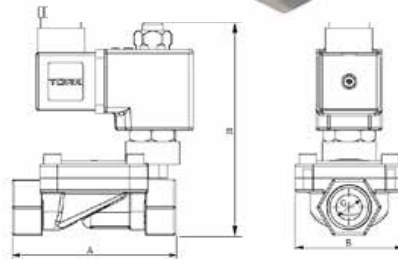

NORMALLY OPEN

2/2 WAY

PILOT OPERATED

ΔP=0,5



Dimensiones(mm)

G	A	B	H
3/8"	79	52	98
1/2"	79	52	98
3/4"	75	58	130
1"	90	61	117
1 1/4"	110	95	158
1 1/2"	129	95	158
2"	150	110	179

Coils	Nominal Values	Cold/ Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C40012VDC18W	12VDC 18W	COLD	19,56	19,56	1,63	20
		HOT	14,52	14,52	1,21	106
C40024VDC18W	24VDC 18W	COLD	20,88	20,88	0,87	25
		HOT	14,64	14,64	0,61	116
C40110VDC18W	110VDC 18W	COLD	19,96	19,96	0,18	23
		HOT	13,56	13,56	0,123	115
C40012VAC15VA	12VAC 15VA	COLD	23,81	16,43	1,3	25
		HOT	-	15,86	1,262	79
C40024VAC15VA	24VAC 15VA	COLD	25,82	15,02	0,62	22
		HOT	-	13,91	0,57	81
C40110VAC15VA	110VAC 15VA	COLD	30,65	15,17	0,137	24
		HOT	-	13,96	0,126	80
C40230VAC15VA	230VAC 15VA	COLD	31,4	15,64	0,068	25
		HOT	-	14,41	0,063	80
C40230VAC24VA	230VAC 24VA	COLD	45,1	23,92	0,0154	23
		HOT	-	21,62	0,0154	100

Solenoid Valve Symbol	Valve Type/ Order No	Connection Size	Orifice Size	Pressure min/max		Kv	Seal			Weight
				Bar	Bar		l/min	EPDM	VITON	
	SS1031	G	mm	Bar	Bar	l/min	EPDM	VITON	NBR	kg
	SS1031.02	3/8"	12,5	0,5	12	48	✓	✓	✓	1,15
	SS1031.03	1/2"	12,5	0,5	12	48	✓	✓	✓	1,1
	SS1031.04	3/4"	20	0,5	12	108	✓	✓	✓	1,12
	SS1031.05	1"	25	0,5	12	172	✓	✓	✓	1,3
	SS1031.06	1 1/4"	30	0,5	12	315	✓	✓	✓	3,55
	SS1031.07	1 1/2"	39	0,5	12	430	✓	✓	✓	3,45
	SS1031.08	2"	46	0,5	12	690	✓	✓	✓	3,88

### STANDARDS

• Standard tube connection G (BSP) (ISO 228-1) and other tube connections (NPT (ANSI120.3)) are available on request.

• TORK solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).

**Not:** Please look catalogues for more details.